

To Program Scanner to Automatically Enter Carriage Return After Scan

Under Carriage Return Line/Feed below scan each bar in succession from top down; Scan Options, Data/Suffix, and Enter.

There should be a confirmation tone after each successful scan. Test in notepad to confirm the scanner has been programmed correctly.

Miscellaneous Settings

Set Defaults



SFT DFFAULTS

Carriage Return/Line Feed



SCAN OPTIONS



<DATA><SUFFIX>



ENTER

Step 3 - Scan **ONE** of the following



STANDARD RS-232



ICL RS-232



NIXDORF RS-232 MODE A



NIXDORF RS-232 MODE B



FUJITSU RS-232



OPOS/JPOS

Step 3 - Scan **ONE** of the following




HID KEYBOARD EMULATION



IBM HAND-HELD USB

Keyboard Wedge

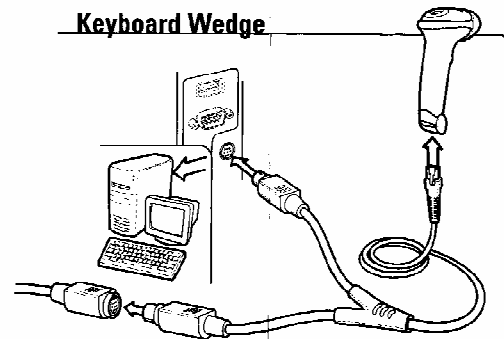

Step 3 - Scan the following



IBM PC/AT and IBM PC COMPATIBLE




PORT 5B



PORT 9B

Wand Emulation

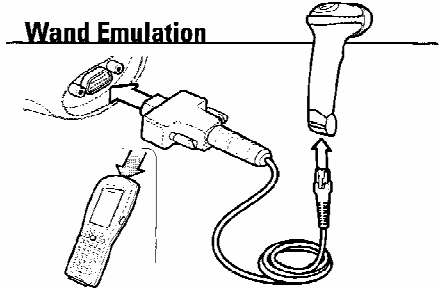

Step 3 - Scan **ONE** of the following



SYMBOL WAND



ENABLE CONVERT TO CODE 39



DISABLE CONVERT TO CODE 39